


FEATURED PRODUCTS



 [SEND EMAIL TO US](#)

Product Tags




Contact us today to integrate this safety solution into your elevator systems. Elevate safety with Yueqing Dahe Electric Co.,Ltd.

Model Description: HBDS1-AGQ ☆○-□◇ ■/◆●/◆/◎/★/▲/△

For example:HBDS1-AGQ16F-11ETZ/J/S/R/DC12V/R

HBDS1-AGQ	Series number	Yueqing Dahe company internal product code
☆	Mounting hole size	16: φ16mm; 19: φ19mm; 22: φ22mm; 25: φ25mm; 30: φ30mm;
○	Head shape	F: Flat round head; H: High round head;
□	Contact combination	11: 1NO1NC; 22: 2NO2NC;
◇	LED type	No letters: Flat head without LED; D: Dot LED; E: Ring LED; DT: Power symbol LED; ET: Ring and power symbol LED; P: Colored plastic cover without LED; DP: Colored plastic cover with LED; PT: Customized symbol without LED(Plastic); DPT: Customized symbol with LED(Plastic); ST: Customized symbol without LED(Metal head); DST: Customized symbol with LED(Metal head); EST: Customized Ring and symbol with LED(Metal head);
■	Operation type	No letters: Momentary; Z: Latching; X: Selector(Rotary)switch without LED; XD: Selector(Rotary)switch with LED; Y: Key switch; TSA: Emergency stop switch (Arrow+Stop); TSC: Emergency stop switch (Arrow); TSD: Emergency stop switch (Reset Arrow);
◆	Operation position	◆ Selector switch and key switch operation position: 2-Two position; 3-Three position
●		● Selector switch and key switch action type: 1: Keep type; 3: Right self-reset and left self-reset;
◆	Wiring type	J: Pin terminal;
◎	Shell material	N: Nickel-plated brass; S: Stainless steel; T: Aluminum alloy;
★	Shell plating color	■R:Red ■G:Green ■Y:Yellow ■O:Orange ■B:Blue □W:White ■H:Black
▲	LED voltage	AC/DC6V; AC/DC12V; AC/DC24V; AC/DC36V; AC/DC110V; AC/DC220V
△	LED color	■R:Red ■G:Green ■Y:Yellow ■O:Orange ■B:Blue □W:White

►Product Size:

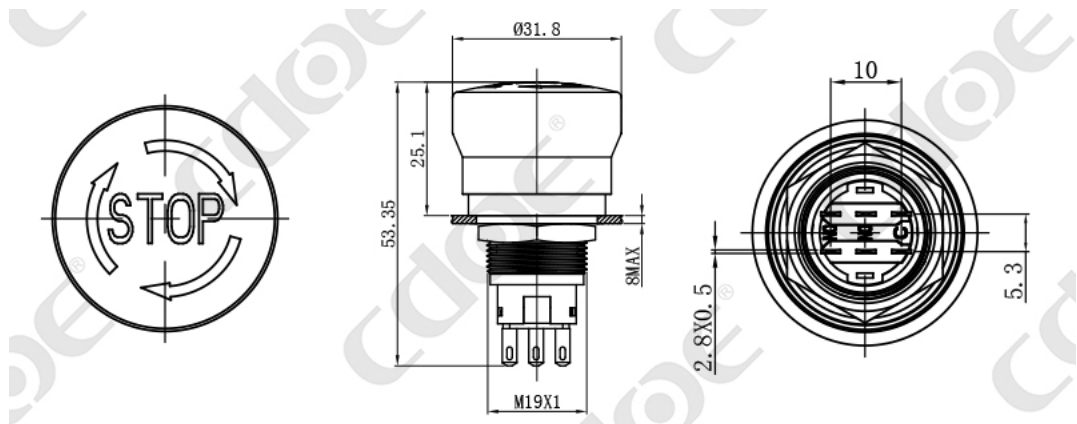

►Technical Parameter:

HBDS1-AGQ19F-TSD/J/T/R Series emergency button 19MM	
Product model :	HBDS1-AGQ19F-TSD/J/T/R
Mounting hole size :	19MM
Switch value:	Ith:5A,UI:250V
Operation type:	Latching
Contact configuration:	1NO1NC,2NO2NC
Appearance material:	Head:Aluminum alloy; Switch button surface:Aluminum alloy; Pedestal:PBT Contact:Silver alloy;
Terminal type:	Pin terminal
Connection form:	Supporting connector/Welding wire
Protection grade:	IP65
Contact resistance:	≤50mΩ
Insulation resistance:	≥100MΩ
Electrical resistance:	AC2500V, 1min, no flicker and breakdown
Life	
Electrical part: Operate 50,000 times under rated load without any abnormality	
Mechanical part: No abnormal movement for 300,000 times	

►Related Product Knowledge:

- >>Metal push button switches
- >>Emergency stop push button switches
- >>How does the Bi-color LED switch work?

Leave Your Message

*

Name

*

Email (We will reply you via email in 24 hours)

*

Phone/WhatsApp/WeChat (Very important)

*

Enter product details such as size, color, materials etc. and other specific requirements to receive an accurate quote.

Send

PRODUCTS CATEGORIES





EMERGENCY POWER OFF BUTTON
19MM IP67 BI COLOR P...



ARROW EMERGENCY STOP 16MM
1NO1NC 2NO2NC PLASTIC...



IP65 EMERGENCY STOP BUTTON 22MM
ONE NORMALLY OP...



Focus on Quality Push Button manufacturing since 2003

© Copyright - 2003-2023 : All Rights Reserved.
Hot Products - Sitemap
push button light switch, Push Button, Push
button Switches, Momentary Push Button Switch,
Buzzer, Push Button Micro Switch,

CONTACT US

📍 Huxi No.2 road, Huxi village, Liushi Town,
Yueqing City, 325604, Zhejiang Province, China
☎ 0086-0577-61780678
✉ cdoe@cncdoe.com

NEWLETTER

For inquiries about our products or pricelist,
please leave your email to us and we will be
in touch within 24 hours.

✉ INQUIRY NOW

SOCIAL

